


WMS-46PLUS2E

46" Intel Core 2 Duo All-in-one Digital Signage System

Drawing

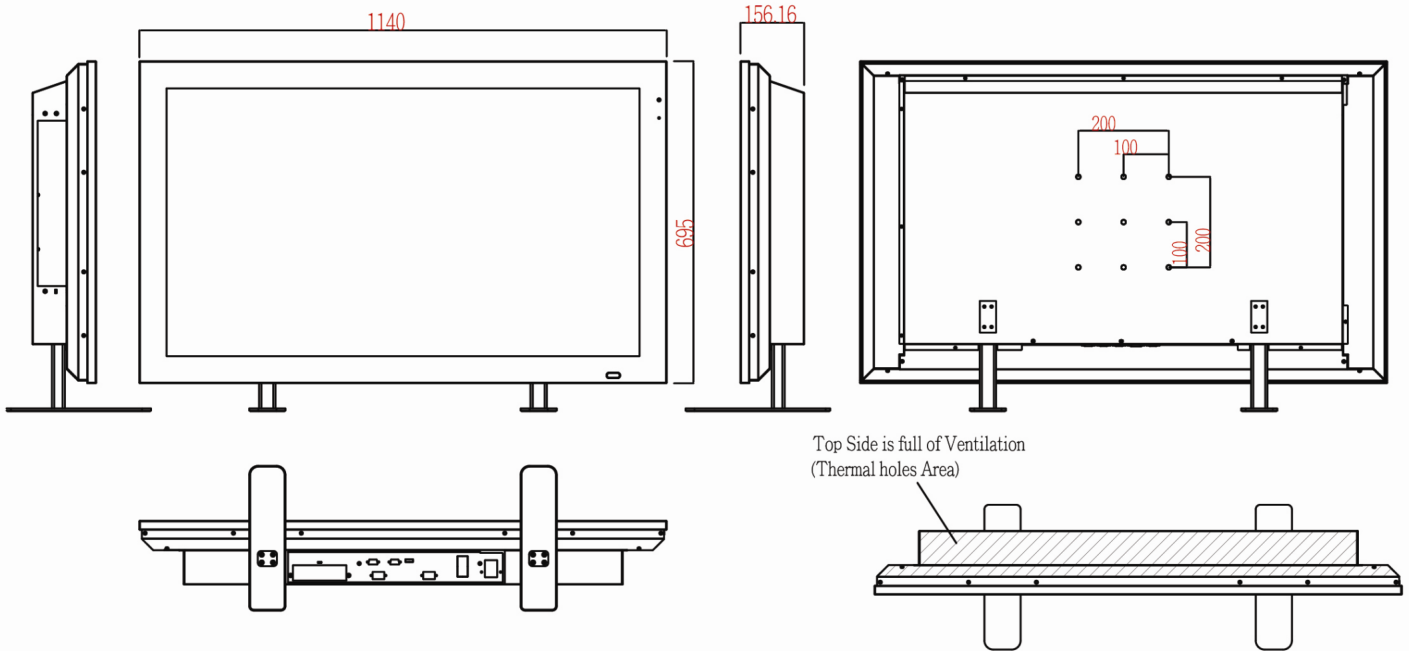

Power

Power input	Direct AC connector, ATX power supply to computer board, 100~240VAC, 50/60Hz, 3.1A
Power consumption and Ampere	Display only: 192W, 1.8A With computer module: 340W, 3.1A
Power switch	Main switch to turn on/off AC power (at the bottom side)
Reset switch	Switch to turn on/off mother board (at the external I/O of PC side)
LED status indicator	Power and HDD indicator at PC board external I/O side (LED colors: Power: Green / Orange: HDD accessing)

External I/O

[Computer Side]

USB	USB 2.0 x 4
COM	RS232 x 1
LAN	RJ-45 x 2 (Gigabit Ethernet)
KB/Mouse	PS/2 Keyboard x1 & Mouse x 1
Audio	Line-in, Mic-in, Line-out audio jacks
DVI-D	Output x 1
IEEE1394a	Fire wire *1 (option)
GPIO connector	8 in 8 out (option)

[Bottom side]

VGA	Input x 1
VGA	Output x 1 (loop signal output with VGA input)
HDMI	Input x 1 (design in option)
Doggy door to access internal DVI-D input x 1	

Dimension and Weight

	WMS-46PLUS2EBK	WMS-46PLUS2EBKIT
Weight (without stand) Kg	40.7	48.2
Weight (with stand) Kg	42.7	50.2
Dimensions (without stand) mm (W) x mm (H) x mm (D)	1140*695*141	1140*695*157
Dimensions (with stand) mm (W) x mm (H) x mm (D)	1140*697*141	1140*697*157

Options

1. TV tuner function & Video capture
2. Wireless LAN
3. VGA card
4. Stand x2
5. Bottom I/O cover
6. Side I/O cover
7. Web camera
8. Speakers (5W+5W) (landscape, portrait)
9. Wall mount bracket (200 x 200 mmxmm)
10. Magnetic stripe card reader

Ordering Information

1. WMS-46PLUS2EBK(bezel + black body)-C2D2.6G CPU-1G RAM-160G HDD
2. WMS-46PLUS2EBKIT(bezel + black body + IR touch)-C2D2.6G CPU-1G RAM-160G HDD