



### Features


- Intel® Skylake/Kaby Lake i7/i5 Medical Panel PC
- 19" 1280x1024 LCD panel
- Highest Level EMC 4.0/ Safety 3.1 Certification Ready
- Support Intel® vPro by Optional i7/i5 CPU
- Anti-Bacteria Plastic Housing
- Support RAID 0,1
- Optional PCI-E x16 Expansion Slot
- Optional Built-In Battery Pack
- Optional 4KV LAN/COM/USB Isolated I/O
- Optional DICOM Part 14 Solution

### Specification

Model	WMP 19F IPOA (STD)	WMP 19F IPOB (ISO)
CPU / Chipset	LGA1151 package 6th generation Intel® Core i7/i5/i3/Celeron processor	
Graphic	Intel® integrated HD Graphics	
RAM	Two 2400 MHz DDR4 SODIMM socket support dual Channel, non-ECC, up to 32GB	
OS Support	Windows 7 embedded, Windows 7 pro, Windows 8 embedded, Windows 8 industrial, Windows 10	
Storage	2.5" SATA HDD drive bay x 1 ,mSATA via mini PCI-E x 1	
Expansion	PCI-E (x16) x1, Mini PCIe x2	
Display Size	19" wide TFT-Color LCD	
Display	1280 x 1024 (SXGA), 16.7M colors, 170(H) / 160(V), 350 nits (Typ. Center point), CR:1000 : 1 (Typ)	
Touch Screen	Full flat projective capacitive touch panel / Light Transmission: 90% ± 3% / Hardness: 7H pencil, pressure 750g/45° / Life: 100M times	
USB	USB3.0 x 4	USB3.0 x 2, USB 2.0 X 2, ISO USB2.0 X 1
COM	RS-232 x 1, RS232/RS422/RS485 X 1	RS-232 x 1, RS232/RS422/RS485 X 1, ISO RS-232 x 1, ISO RS232/RS422/RS485 X 1
LAN	RJ45 X 2	RJ45 x 2, ISO LAN x 1
Audio/ Video	3.5mm phone jack connector * 2 (Line-out, Mic-In)/ DP x 1, DVI x 1	
Control Hot Key (R to L)	Power Button// Audio adjustment // brightness // LCD on/off // Clean me	
Cooling	Smart Fan	
Power Input	DC-In x 1, DC 7~32V input	
Power Adapter	AC input 100~240V / 47 ~ 63 Hz / DC output 24V, 180W	
Temperature	Operating Temperature: 0~40°C (chamber) / Storage Temperature: -20~60°C	
Humidity	Operating & Storage:10 ~ 90%, non-condensing	
IP Rating / Housing	IP65 (Front Side), IPx1 whole system / Front: Full flat design/ Touch (standard)/ Glass( customized); Rear: Plastic White w/Anti-bacteria (MRSA), Housing	
Dimensions (Net)	450.0mm (H) x 420mm (V) x 85.3mm (T)	
Weights (Net)	7.5 kg (w/o power adapter/battery pack)	
Mounting	Optional Stand, VESA 75/ 100	
Certification	cULus/EN/UL/60601-1, 60601-1-2 4th Edition, IEC62133, FCC/CE/VCCI Class B, Energy Star 6.1 Compliance	

# WMP-19F

## Medical AIO Core™ Fan

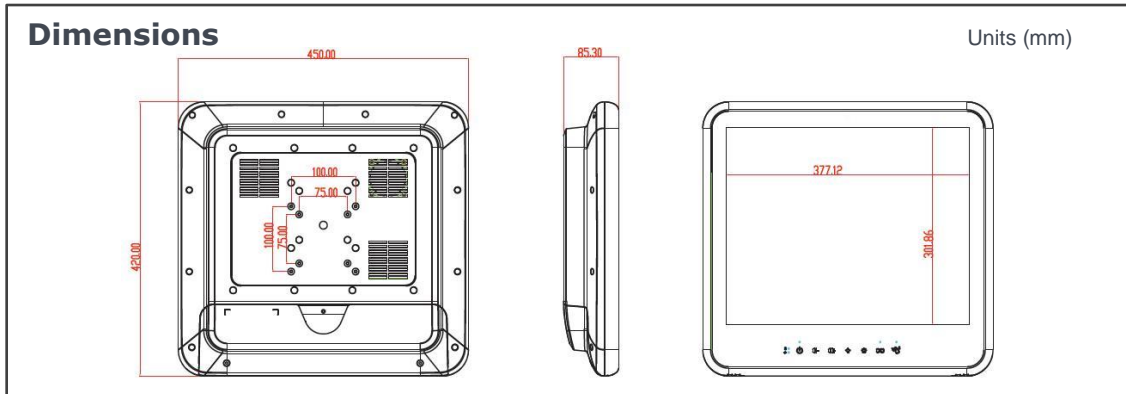


### Major Options

Add On Parts	<ol style="list-style-type: none"> <li>3.2M Webcam(USB)</li> <li>TPM 2.0 module</li> <li>Wireless or Wireless + BT kit</li> <li>RFID (13.56MHz)</li> <li>AG Film</li> <li>PCI-E [x16] riser card</li> <li>Equipotential Terminal Pin</li> <li>2.5" SSD</li> <li>Battery pack (100W max.) Support add-on card 18W max</li> <li>mSATA module</li> <li>Full HD Capture Card</li> <li>4KV Isolation Card x 1 (Isolation COM x 2, Isolation LAN x 1, Isolation USB x 1)</li> <li>DICOM Part 14 Compliance Module</li> </ol>
Power Cable	<ol style="list-style-type: none"> <li>Power adapter w/ 2m extension cable</li> <li>Power plug holder</li> </ol>
Optional kits	<ol style="list-style-type: none"> <li>Anti-bacteria Stand</li> <li>VESA Wall Mount</li> </ol>
Customized	<ol style="list-style-type: none"> <li>Temper Glass</li> <li>Extra USB x 2 or COM x 2</li> </ol>

## Order Information

Item	Configuration
WMP-19F-IP0A-i5	Core i5-6500TE 2.3GHz / 4G RAM / 500G HDD / Full flat P.cap touch / STD I.O.
WMP-19F-IP0A-i7	Core i7-6700TE 2.4GHz / 4G RAM / 500G HDD / Full flat P.cap touch / STD I.O.
WMP-19F-IP0B-i5	Core i5-6500TE 2.3GHz / 4G RAM / 500G HDD / Full flat P.cap touch / ISO
WMP-19F-IP0B-i7	Core i7-6700TE 2.4GHz / 4G RAM / 500G HDD / Full flat P.cap touch / ISO

### STD IO Parts

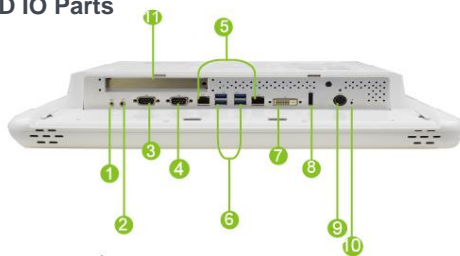

- |                 |                         |
|-----------------|-------------------------|
| ① Line-out      | ⑦ DVI-D                 |
| ② Microphone-in | ⑧ DP x 1                |
| ③ RS232/422/485 | ⑨ DC-in                 |
| ④ RS232         | ⑩ Reset                 |
| ⑤ LAN x 2       | ⑪ PCI-E [x16] expansion |
| ⑥ USB3.0 x 4    |                         |

