




Features

- Intel® Celeron J1900 Fanless & Slim Panel PC
- 12" 800x600 (SVGA) LCD 450nits
- Low Power and Fanless Thermal Solution
- Panel Mounted w/Full Flat Resis. or P-Cap Touch
- CE, FCC, VCCI Class B Certified
- Full Flat Design Easy Clean & IP66 Front
- Optional Lock Screen Key Design
- Optional WLAN with External Antenna

Specification


Product	WLP-7B20-12 BKFT		WLP-7B20-12 BKPT	
Main System	CPU	Intel® Celeron J1900 2.0 GHz quad-core processor 10W		
	Graphic	Intel® integrated HD Graphics		
	Memory	Two DDR3L-1333 SODIMM socket support up to 8GB		
	OS Support	Win 7pro, Win 8, Win 8.1 industrial, Win 10		
Display	Size	12", 4:3		
	Resolution (pixel)	800 x 600 (SVGA)		
	Number of Colors	16.2M colors		
	View Angle (H/V)	160(H) / 140(V)		
	Brightness(cd/m ² , nit)	450 nits		
	Contrast Ratio	700:1 (Typ)		
Touch Panel	Type	Resistive touch panel	Projected capacitive touch panel	
	Light Transmission	80 ± 5%	90 ± 3%	
	Hardness	4H	7H	
	Lifetime	35M times	100M times	
Storage & Expansion	Storage	2.5" SATA HDD up to 320G/500GB w/Anti-Vibration Kit		
	Expansion	Mini PCIe x 2		
I/O Ports	USB	USB 3.0 x 1, USB 2.0 x 3		
	COM	2 X RS-232, 1 X RS-232/422/485		
	LAN	2 x RJ-45		
	Audio / Video	3.5mm phone jack connector x 2 (Line-out, Mic-in) / DVI-I x 1		
	Control Keys	Rear bottom: Power on /off		
Power	Power input	DC-in x 1 , 7 ~ 32V		
	Power adapter	AC 90 ~ 264V / 47 ~ 63 Hz / DC output 12V		
Environmental	Temperature	Operating Temperature: 0~50°C (12V DC, air flow cooling) Storage Temperature: -20~60°C		
	Humidity	Operating & Storage: 10 ~ 90%, non-condensing		
	Water/Dust resistance	IP66 at front		
Mechanical Characteristics	Housing	Front bezel is Aluminum, others are SECC with black coating		
	Dimensions (Net: mm)	369 (H) x 290 (V) x 55 (T)		
	Weights (Net: kg)	4.5 kg		
	Mounting	Panel mount, Optional Open frame / Chassis, VESA (75x75)		
Certification	CE/ FCC/ VCCI Class B			

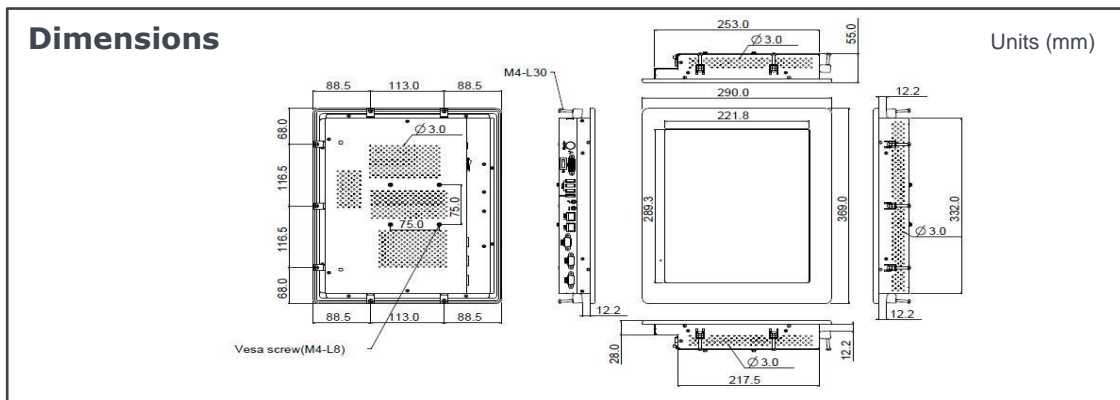

Major Options	
Add On Parts	1.Wireless or Wireless + BT kit , 2.Stainless front bezel, 3. Silver front bezel, 4.TPM 2.0, 5.Chassis type housing, 6. 2.5" SSD, 7.P-cap touch (BKPT)
Add On Cable	1.DC input power plug (black, 1.22m length), 2.Maximum length is 5.2 meters by 2x2m DC cables
Customized	1.Open frame housing, 2.Sunlight readable optical bonding, 3.LCD auto dimming, 4.LCD super dimming (Low brightness), 5.Storage door Solution

Order Information

Item	Touch	Description
WLP-7B20-12 (BKFT)	Full Flat Resis.touch	12" Celeron J1900/ DDR4 2G RAM/ 500G HDD
WLP-7B20-12 (BKPT)	Full Flat P-cap. touch	12" Celeron J1900/ DDR4 2G RAM/ 500G HDD

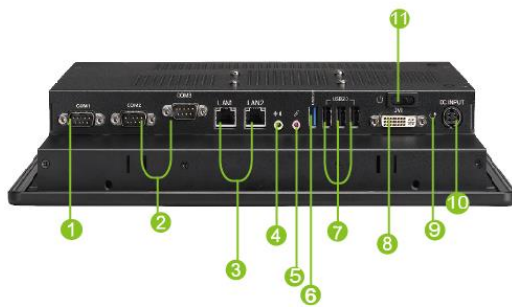

- ① RS232/422/485
- ② RS232 x 2
- ③ LAN x 2
- ④ Line out
- ⑤ Microphone-in
- ⑥ USB 3.0
- ⑦ USB 2.0 x 3
- ⑧ DVI-I output
- ⑨ Reset
- ⑩ DC-in
- ⑪ Power on/off

