




## **Features**

- Intel® 6th /7th Generation Core i7/i5/i3 CPU
- 15" 1024x768 LCD 450nits
- P-Cap Touch with Front IP66 Design
- Front Panel Mount Housing
- Vpro Support by CPU
- CE, FCC, VCCI Class B Passed
- Optional WLAN with External Antenna

## **Specification**

Product		WLP-7F20-15 BKFT	WLP-7F20-15 BKPT
Main System	CPU	6th generation Intel® Core i7/i5/i3 processor 7th generation Intel® Core i7/i5 processor	
	Graphic	Intel® integrated HD Graphics by CPU	
	Memory	Two 2133 MHz DDR4 SODIMM socket support dual Channel, non-ECC, up to 32GB	
	OS Support	Win 7, Win 7 Pro, Win 8, Win 10	
Display	Size	15", 4:3	
	Resolution (pixel)	1024 x 768 (XGA)	
	Number of Colors	16.2M colors	
	View Angle (H/V)	160(H) / 160(V)	
	Brightness(cd/m², nit)	350 nits	
	Contrast Ratio	800:1 (Typ)	
Touch Panel	Туре	Full flat resistive touch panel	Full flat projected capacitive touch panel
	Light Transmission	80 ± 5%	90 ± 3%
	Hardness	3H	7H
	Lifetime	35M times	100M times
Storage &	Storage	2.5" SATA HDD drive bay x 1 (with anti-vibration mechanism)	
Expansion	Expansion	Mini PCIe x 1, M.2 Type E x 1	
	USB	USB 3.0 x 4	
	COM	2 X RS-232, 1 X RS-232/422/485	
I/O Ports	LAN	2 x RJ-45	
	Audio / Video	3.5mm phone jack connector x 2 ( Line-out, Mic-in) / DP x 2	
	Control Keys	Rear bottom: Power on /off	
Power	Power input	DC 9~32V input, optional DC 12V (by DC-DC adapter)	
	Power adapter	External, 60 watts, universal 100 ~240V AC in, 12V DC out, 5A	
	Temperature	Operating Temperature: $0\sim50^{\circ}$ C (12V DC, air flow cooling) Storage Temperature: $-20\sim60^{\circ}$ C	
Environmental	Humidity	Operating & Storage: 10 ~ 90%, non-condensing	
	Water/Dust resistance	IP66 at front	
	Housing	Front bezel is Aluminum, others are SECC with black coating	
Mechanical Characteristics	Dimensions (Net: mm)	398 (H) x 330 (V) x 86 (T)	
	Weights (Net: kg))	6 kg	
	Mounting	Panel mount, Optional Open frame / Chassis, VESA (75x75)	
Certification	CE/ FCC/ VCCI Class B, Canada ICES-003		




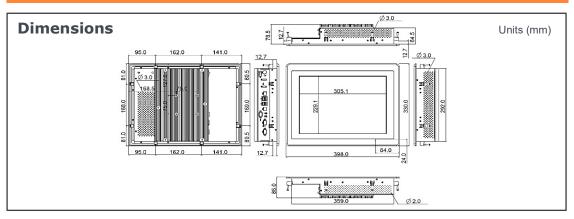

Major Options			
Add On Parts	1.Wireless or Wireless and BT kit 2.2.5" SSD 3.Stainless steel front bezel 4.Change full flat resistive touch to P-cap touch (BKPT) 5.Silver front bezel 6.Storage door Solution 7.mSATA module 8.TPM 2.0 9.Chassis type housing		
Add On Cable	1.DC input power plug (black, 1.22m length) 2.Maximum length is 5.2 meters by 2x2m DC cables		
Customized	1. Open frame housing 2.Sunlight readable optical bonding 3.LCD auto dimming 4.LCD super dimming (Low brightness)		

## **Order Information**

Item	Touch	Description
WLP-7F20-15 (i5)	Full Flat Resistive Touch	15" Core i5-6200U/ DDR4 4G RAM/ 500G HDD
WLP-7F20-15 (i5)	Full Flat Resistive Touch	15" Core i5-7200U/ DDR4 4G RAM/ 500G HDD



- RS232 x 2 OP x 2
- Stine out 8 Reset
- 4 Microphone-in 9 DC-in
- 6 LAN x 2 Power on/off



