




Features

- 23.8" Intel® 6th / 7th Generation Fanless Stainless Panel PC Wide Temp
- IP66/69K Full Sealed with Anti-Corrosion Enclosure
- Support Intel® vPro technology by CPU
- Optional IP67 M12 Stainless Connectors
- Optional Cable Gland for External I.O.
- Special Inspection of 100% Waterproof Guarantee
- CE, FCC, VCCI Class B Certified

Specification

Product		WTP-9E66-24W
Main System	CPU	Intel® 6th/ 7th generation core i7/i5 processor
	Graphic	Intel® integrated HD Graphics
	Memory	Two 2133 DDR4 SODIMM socket support dual Channel, non-ECC, up to 32GB
	OS Support	Windows 7, Windows 7 pro, Windows 8, Windows 10
Display	Size	23.8" 16:9
	Resolution (pixel)	1920 x 1080 (Full HD)
	Number of Colors	16.7M colors (RGB 6-bit + Hi FRC)
	View Angle (H/V)	178(H) / 178(H)
	Brightness(cd/m ² , nit)	250 nits
	Contrast Ratio	3000:1 (Typ)
Touch Panel	Type	Full flat projected capacitive touch panel
	Hardness	≥ 7H
	Light Transmission	≥ 85%
	Lifetime	100M times
Storage & Expansion	Storage	2.5" SATA HDD
	Expansion	Mini PCIe x 1, M.2 Type E x 1
I/O Ports	USB	1 x M12 8pin for USB 1/2, 1 x M12 8pin for USB 3/4
	COM	1 X M12 8pin/ RS-232, 1 X M12 8pin/ RS-232/422/485
	LAN	1 x M12 8pin for LAN x 1 (i219LM for Vpro)
	DC in	1 x M12 5pin DC power connector
	Control Keys	Rear bottom: Power on /off
Power	Power input	DC 9V~32V
	Power adapter	AC100~277V/ 47 ~ 63 Hz / DC output 24V, IP68
	Power consumption	TBD
Environmental	Temperature	Operating Temperature: -20~60°C(IEC60068-2-56, air flow cooling) Storage Temperature:-20~60°C
	Humidity	Operating & Storage: 10 ~ 90%, non-condensing
	Water/Dust resistance	IP66/ NEMA4X/ IP69K
Mechanical Characteristics	Housing	Stainless steel (SUS304), chassis type
	Dimensions (Net: mm)	626.6 x 396.1 x 64.0
	Weights (Net: kg)	14.8 kg
	Mounting	VESA 100*100, Side Mount (M6 x 2)
Certification	FCC-B, CE (EMC), VCCI Class B, Canada ICES-003	

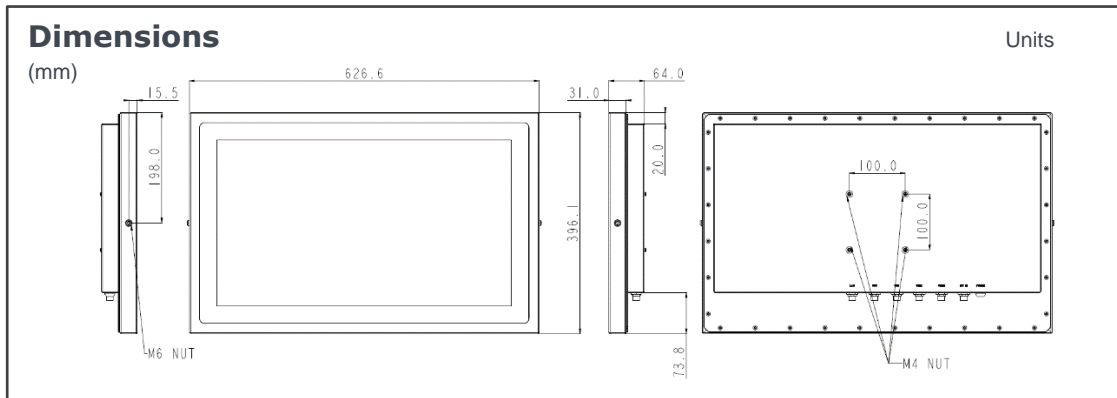


Major Options

Add On Parts	<ol style="list-style-type: none"> 1. Wireless LAN or Wireless and BT kit (Easy Clean and Robust Antenna or 2 ant), 2. Stainless M12 connector 3. 2 External LAN (USB X 2, LAN X 2, COM X 1) 4. TPM, 5. Waterproof USB 3.0, 6. IP67, 7. Full Flat PCT Touch Screen IP69K, 8. SUS316 Enclosure 9. Cable Gland for External I.O.
Optional kits	1. Wall mount/ Table mount bracket
Customized	<ol style="list-style-type: none"> 1. Sunlight readable optical bonding, 2. 1000 nit high brightness LCD , 3. LCD Auto dimming, 4. LCD Super dimming (Low brightness) , 5. 5W/2WSpeaker, 6. Second HD, 7. COM + power 5V or 12V, 8. Barcode reader,

Order Information

Item	Cooling	Description
WTP-9E66-24W	Fanless	23.8" Core i5-6200U / DDR4 4G RAM/ 500G HDD/ 4 USB, 2 COM, 1 LAN
WTP-9E66-24W	Fanless	23.8" Core i5-7200U / DDR4 4G RAM/ 500G HDD/ 4 USB, 2 COM, 1 LAN

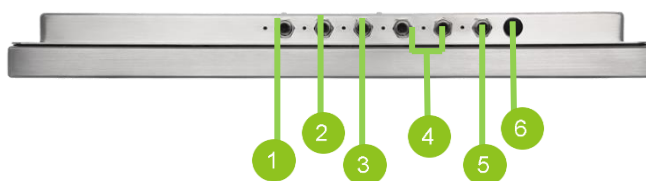

- 1 Giga LAN
- 2 USB 1/2
- 3 USB 3/4
- 4 COM x 2
- 5 DC in
- 6 Power on/off

